

Assembly Instructions

Vertical Bike Rack, 4-Bike Capacity

Before Assembly, be sure that all components are included.		
Part	Description	Qty
A	Bike Track w/ Locking Loop	4
B	Vertical Side Post w/ Stabilizing Foot	2
C	Horizontal Bar	2
D	M8x65mm Bolt, Washer, Lock-Nut	16 sets
E	M8x40mm Bolt, Washer, Lock-Nut	8 sets




Special Warnings


- We suggest you thoroughly read and follow this simple step-by-step assembly instruction. Portions of the assembly may be easier with two people.
- Do not discard any of the packaging until you have checked that you have all the parts.
- Plastic polybags can be dangerous. Keep the bags away from babies and children to avoid danger of suffocation.
- Set out all parts on a clear, flat and level surface.
- Assemble all parts loosely before tightening any bolts or fixing.
- Check and ensure that all bolts are fully tightened when finished assembling, but DO NOT over tighten.
- Mounting Vertical Bike Rack to floor is recommended

Assembly Steps:

Step # 1: Assemble Vertical Side Posts (B) to Horizontal Bars (C) with 16 pcs of Bolts, Washers and Lock-Nuts (D). **Hand tighten!**

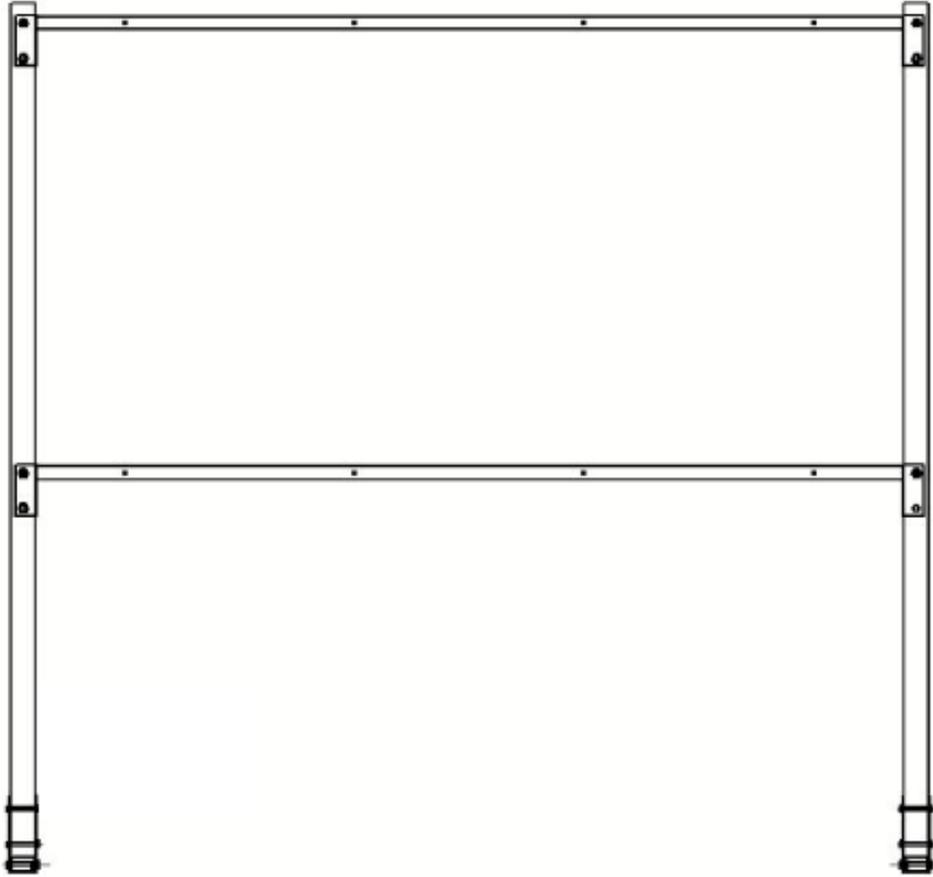

Step # 2: Attach four Bike Tracks w/ Locking Loops (A) onto the assembled frames in Step 1 with 8 pcs of M8 x 40mm Bolts, Washers and Lock-Nuts (E). **Hand tighten!**

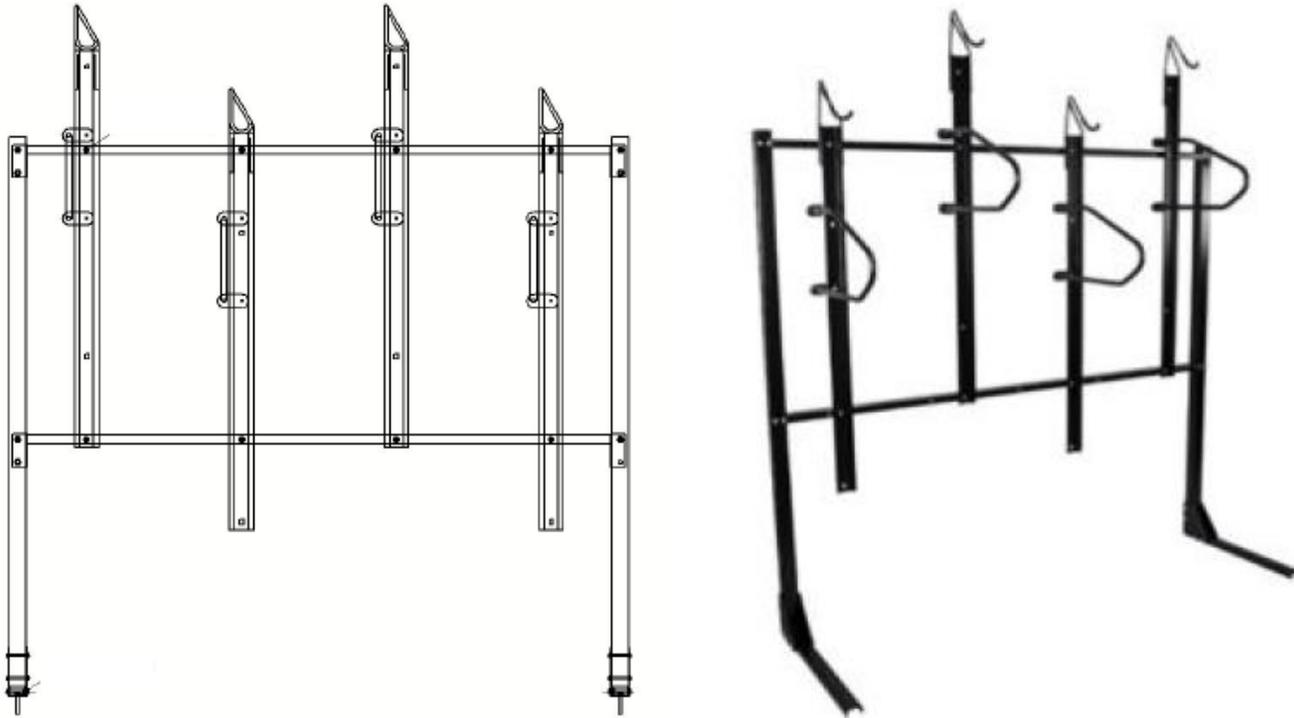

Step # 3: **Tighten all the bolts and nuts by Allen Wrench and Hexagon Wrench (Not Included).** Mounting rack to floor is recommended for stability and safety.

Install the assembled vertical bike rack on the ground that you want to place, electric drill with 12mm drill bit, 13mm wrench and 4 sets of M8x60mm expansion bolts are required (not included).

1. Measure the distance between the 4 mounting holes of the bike rack frame base, and use the electric drill to drill four mounting holes on the ground according to the measured data.
2. Clean the ground mounting holes, and insert four sets of expansion bolts into the four ground mounting holes. Tighten each bolt to expand the tube and secure the tube in the ground mounting hole. Then loosen each bolt out of the ground mounting hole and remove the washers.
3. Insert each bolt through the washer and the bike rack frame base mounting holes into the ground mounting hole. Tighten each bolt to secure the bike rack. Your vertical bike rack is now ready to use.

