Assembly Instructions


Vertical Bike Rack, 1-Bike Capacity

A Special Warnings

- > Do not discard any of the packaging until you have checked that you have all the parts.
- > Plastic polybags can be dangerous. Keep the bags away from babies and children to avoid danger of suffocation.
- > Set out all parts on a clear, flat and level surface.
- > Assemble all parts loosely before tightening any bolts or fixing.
- > Check and ensure that all bolts are fully tightened when finished assembling, but DO NOT over tighten.
- > Mounting Vertical Bike Rack to floor is recommended

Mounting Single Bike Racks

Bike Tracks can be mounted to any wall, corner, pillar, or post strong enough to hold the bikes. Use mounting holes as shown in illustration.

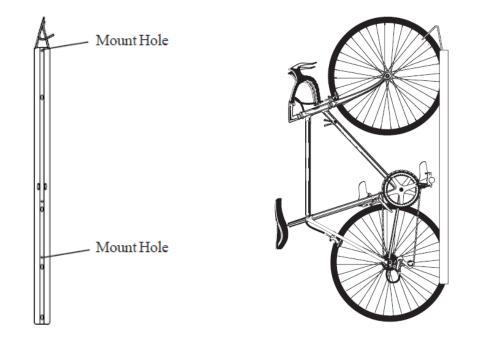

Bike Track Placement

Option 1: Stagger tops of Bike Tracks (high, low, high). Approx. space between 12" – 15"

Option 2: Level tops of Bike Tracks, hanging every other bike by rear tire. Approx. space between each 15" - 18"

Option 3: Level tops of Bike Tracks, hanging all bikes by front tire. Approx. space between 18" – 21"

NOTE: Be sure to leave enough room between each Bike Track so that the bike's handlebars do not interfere with each other. Optimum distance between Tracks will depend on make and model of bike.