


ITEM NO.	DESCRIPTION	QTY.
1	Bench With Back stand FS	3
2	10' Seat/Back	2
3	3/8"x1-1/2" SS Hex Bolt	12
4	3/8" SS Flat Washer	27
5	3/8" SS Nylock Nut	15
6	10' BENCH WITH BACK BRACE	1

TOTAL COAT BENCH 8' WITH BACK, IN-GROUND MOUNT

PR934-601

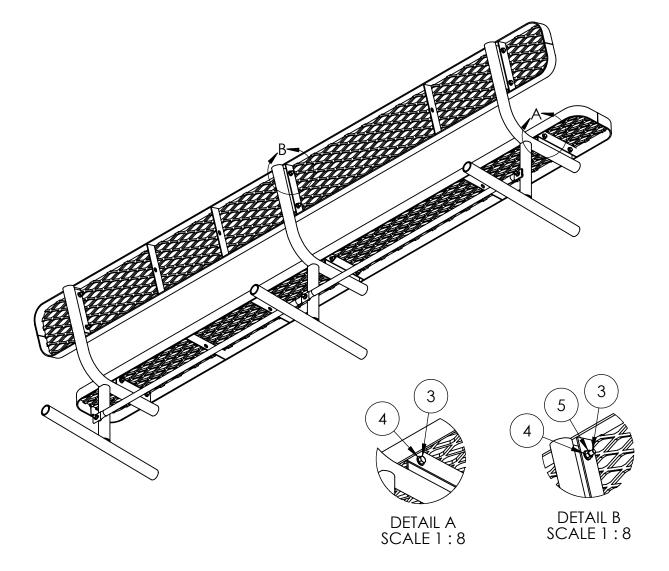

- 1. Drill plastic out of the mounting holes on the seat, back and stands using a 7/16" diameter drill bit.
- 2. Bolt the seat to the stand and braces loosely using fixings provided. Set on level surface and tighten up.

Tools List

- 7/16" Drill bit
- 9/16" Socket
- 9/16" Wrench
- Imapct Gun (Optional)
- Drill

Periodic check of bolts tightness reccommended

In accordance to California law: WARNING - This product contains a chemical known to the State of California to cause cancer and birth defects or other reproductive harm.