

Specifications

3" Low Profile Wheel Stop

Dimensions

72" l x 6" w x 3.25" h

*All dimensions are nominal

– allow for up to 3-6% mold shrinkage

Weight

15 lbs. (Bolt Down)

18 lbs. (Glue Down)



Physical Properties

Compressive Strength: 3,200-3,800 lbs./sq. in.

Density: 0.917 to 0.980 g/cc (ASTM D792)

Electrical Properties: >10 (ohm/cm) ASTM D257

Flexural Modulus: 1.6×10 psi

Flash Point: 330 °C (ASTM D138)

Hardness (Shore D): 65 Shore D

Izod Impact: 2.8 (lb f/in)




Tensile Strength: 1,470-1,700 psi

Thermal Expansion: 0.0007 (in/°F) ASTM D696

Water Absorption: <0.01% 24 Hours (ASTM D570)

Composition: 97% LDPE, 3% colorant

3 1/4" Mighty-Mite 6' Parking Block

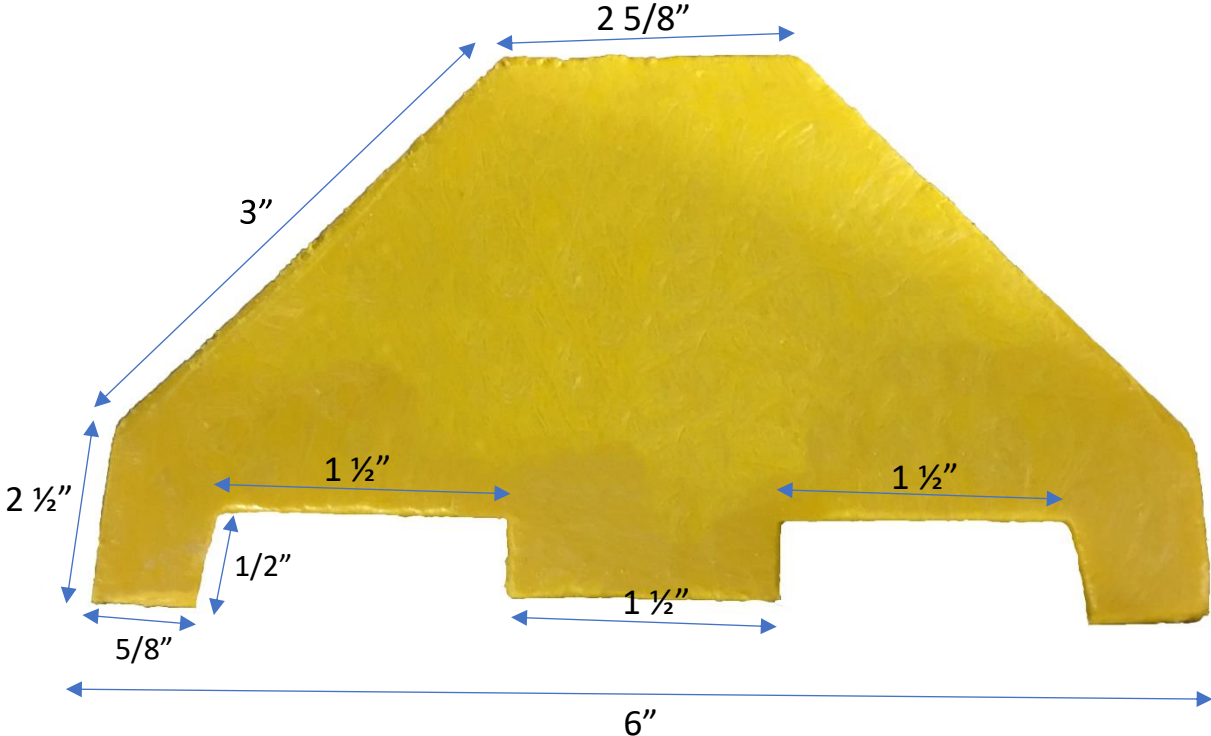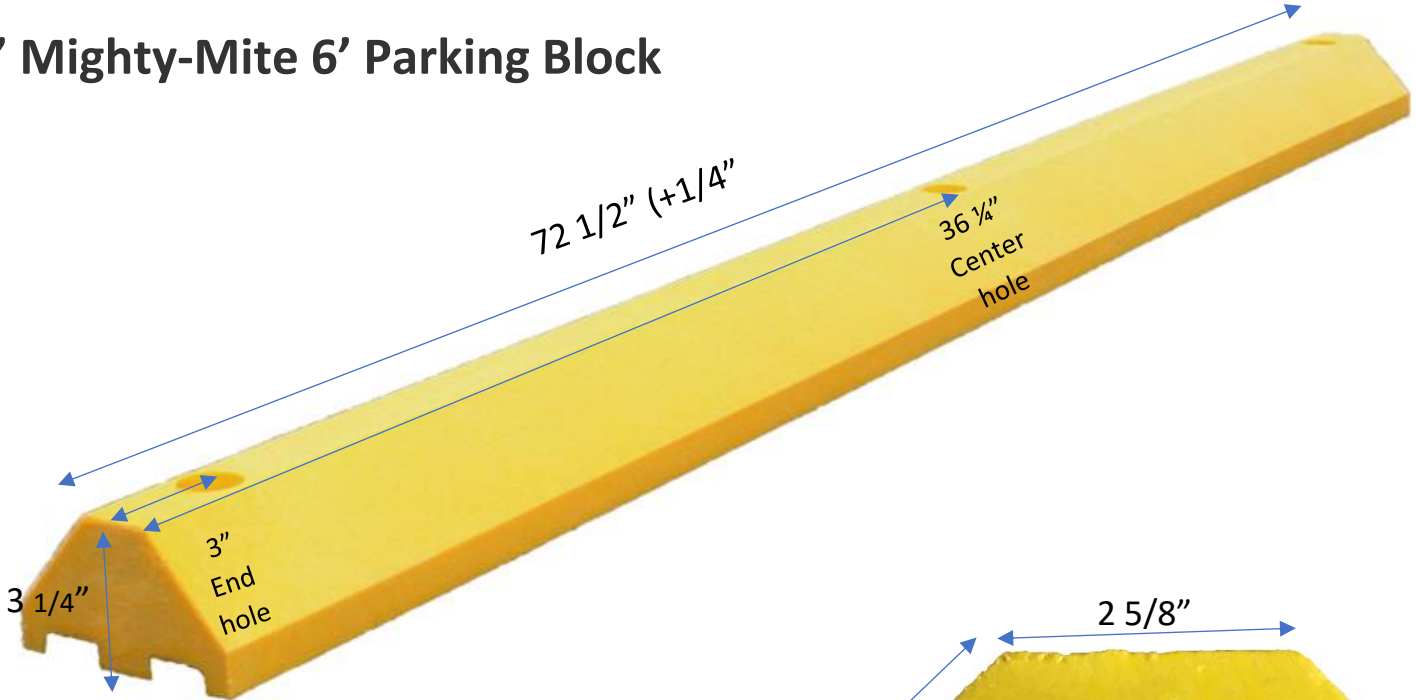

1/2" Countersunk Molded Hardware Hole
1" x 1/2" Oblong Hardware Opening