

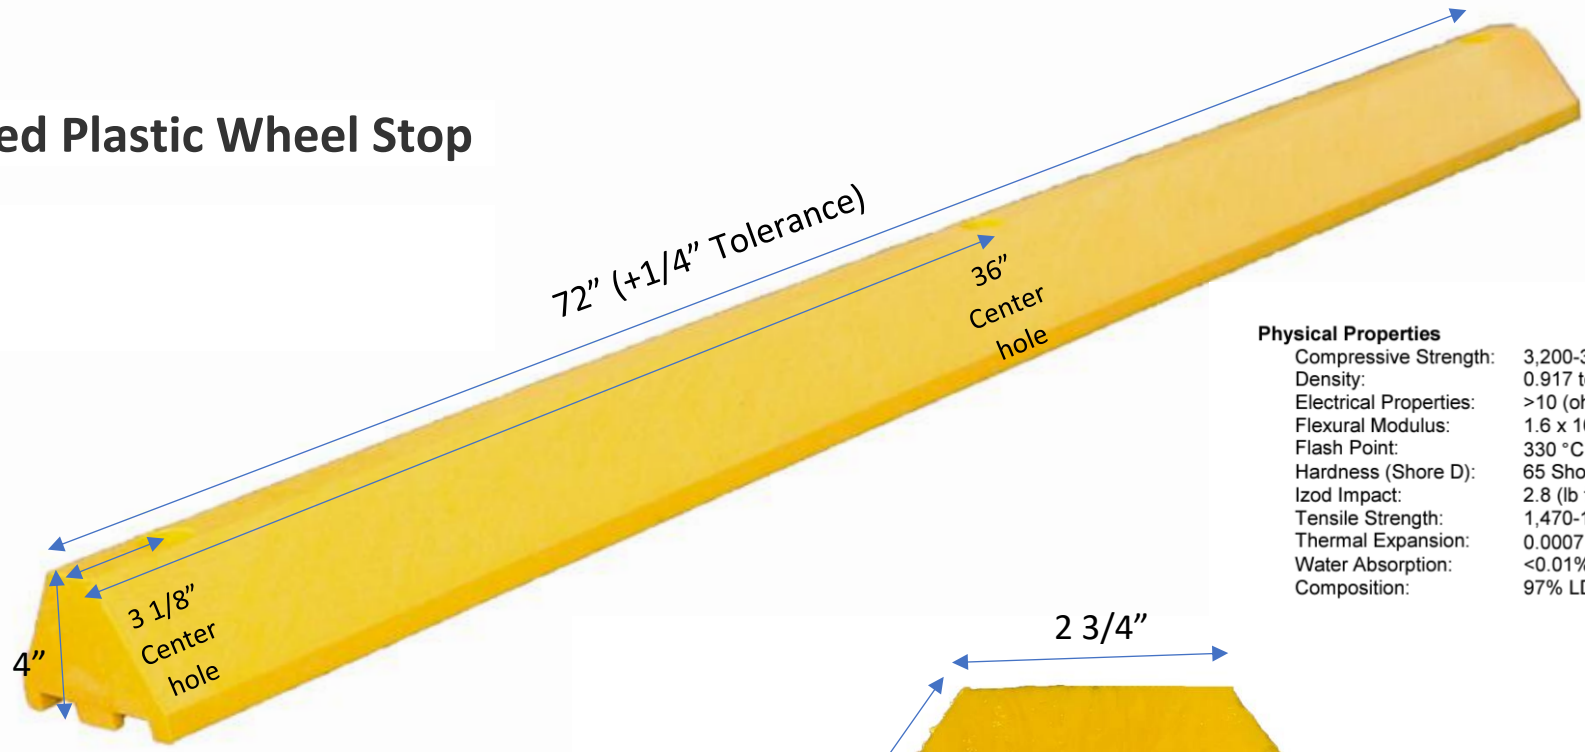


Recycled Plastic Wheel Stop



Physical Properties

Compressive Strength:	3,200-3,800 lbs./sq. in.
Density:	0.917 to 0.980 g/cc (ASTM D792)
Electrical Properties:	>10 (ohm/cm) ASTM D257
Flexural Modulus:	1.6 x 10 ¹⁰ psi
Flash Point:	330 °C (ASTM D138)
Hardness (Shore D):	65 Shore D
Izod Impact:	2.8 (lb f/in)
Tensile Strength:	1,470-1,700 psi
Thermal Expansion:	0.0007 (in/°F) ASTM D696
Water Absorption:	<0.01% 24 Hours (ASTM D570)
Composition:	97% LDPE, 3% colorant

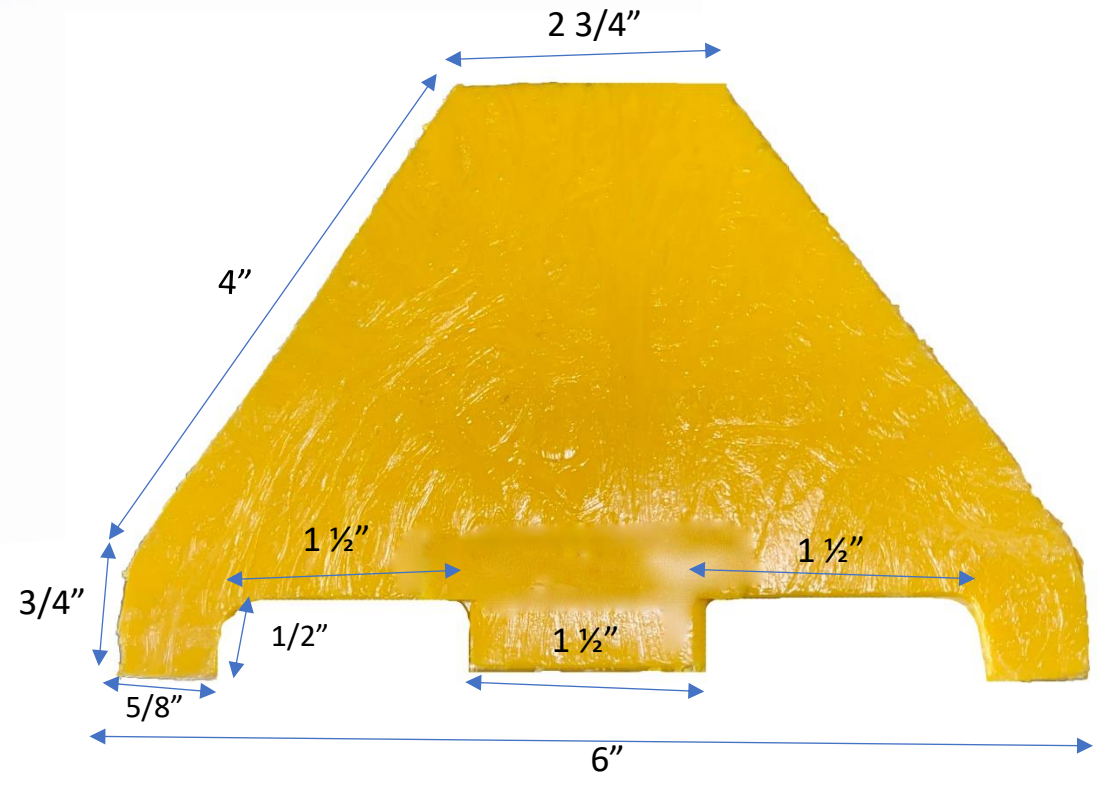

1/2" Countersunk Molded Hardware Hole
 1" x 1/2" Oblong Hardware Opening