



# 4' Square Picnic Table With Back Rests Expanded Metal

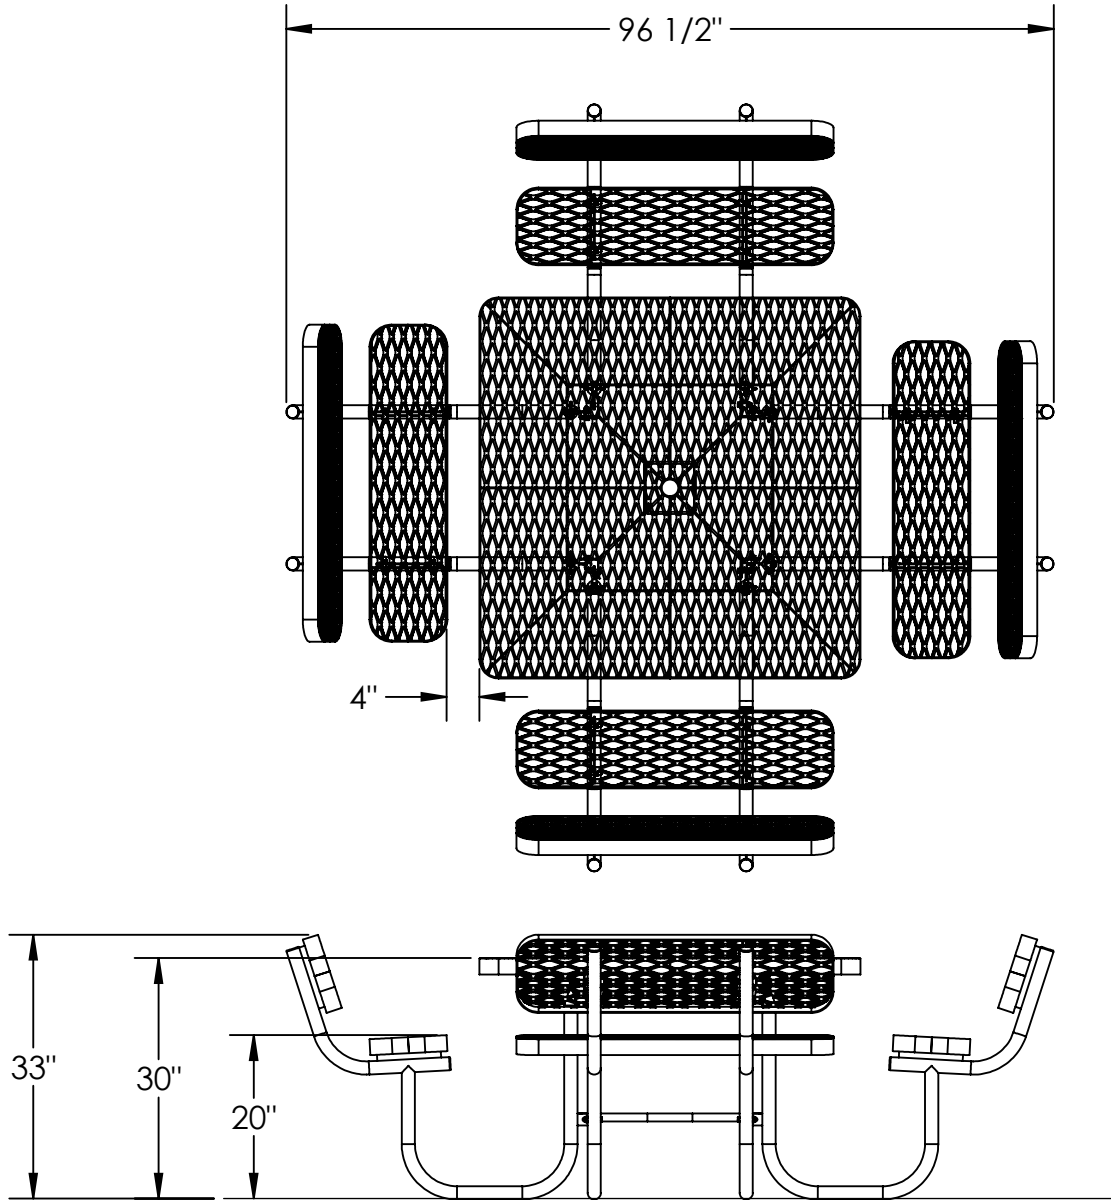

ITEM NO.	DESCRIPTION	QTY.
1	Square Table Top	1
2	Sq./Rnd Table Free Standing Leg W/Back	8
3	Sq./Rnd Table Leg Support Bracket	1
4	40" Seat	8
5	3/8"x1-1/2" SS Hex Bolt	48
6	3/8" SS Flat Washer	96
7	3/8" SS Nylock Nut	48

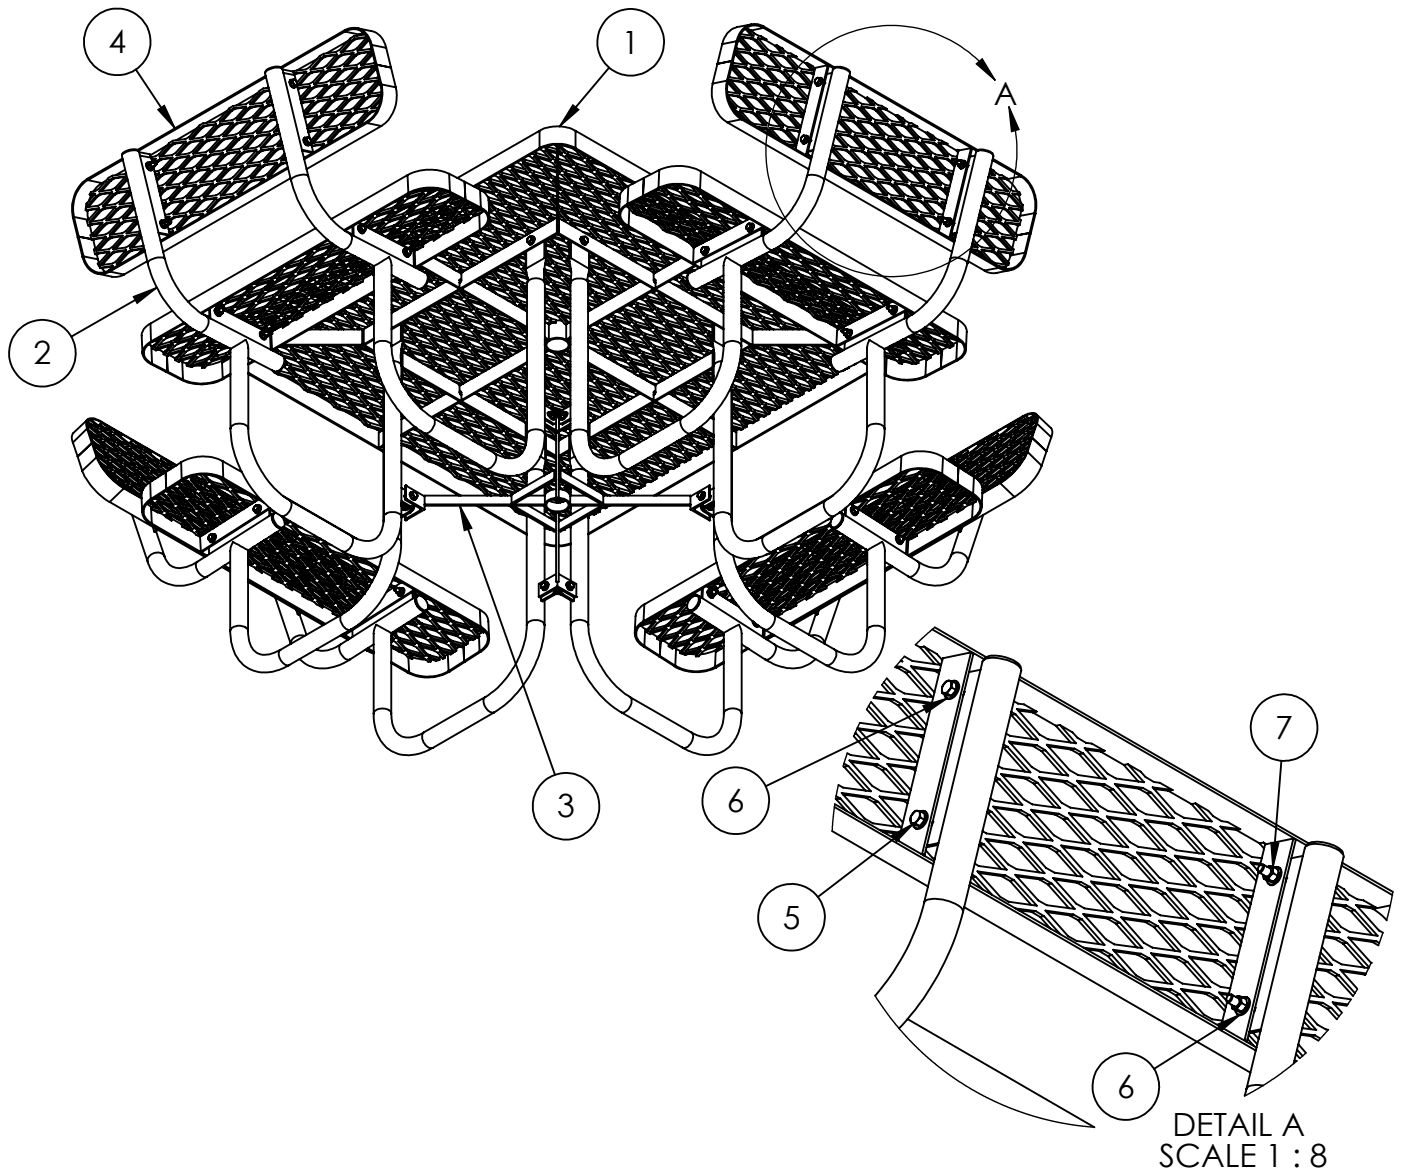

1. Place the tabletop upside down on top of a pair of sawhorses or 12" blocks (cover the blocks with cardboard) and drill out the 8 holes in the frame using a 7/16" drill bit.
2. Drill out the 8 holes in the leg bracket with the same 7/16" drill bit.
3. Drill out the 6 holes on each of the table legs using the 7/16" drill bit.
4. Attach the leg top to the inside of the tabletop frame with a hex bolt, 2 washers and a nylock nut. *Do not tighten completely.*
5. Repeat step 4 by attaching another leg on the same side as the first.
6. Attach the leg bracket to the threaded stud on the 2 legs that you just attached to the tabletop. Use a washer and nylock nut. Again do not tighten completely.
7. Continue attaching the legs to the tabletop and leg bracket. When you have all of the legs attached, flip the table right side up.
8. Drill out the 4 holes in the seat/back and install them onto the legs. **Note:** *The cross frames on the seat/back aren't the same distance from the ends. Be sure to align the seat with the back. The cross frame on the seat/back attaches to the same side of the mounting plate on each leg. (Both on the left or both on the right)*
9. When you have all of the parts attached you can begin tightening the bolts. Make sure the table is on a level surface and adjust the legs and set/backs so that they are level as you tighten each component.

In Accordance to California law: WARNING This product contains a chemical known to the State of California to cause cancer and birth defects or other reproductive harm.

Periodic check of bolt tightness recommended.